




Woodworking adhesives

Adhesive solutions for your professional needs and industrial processes

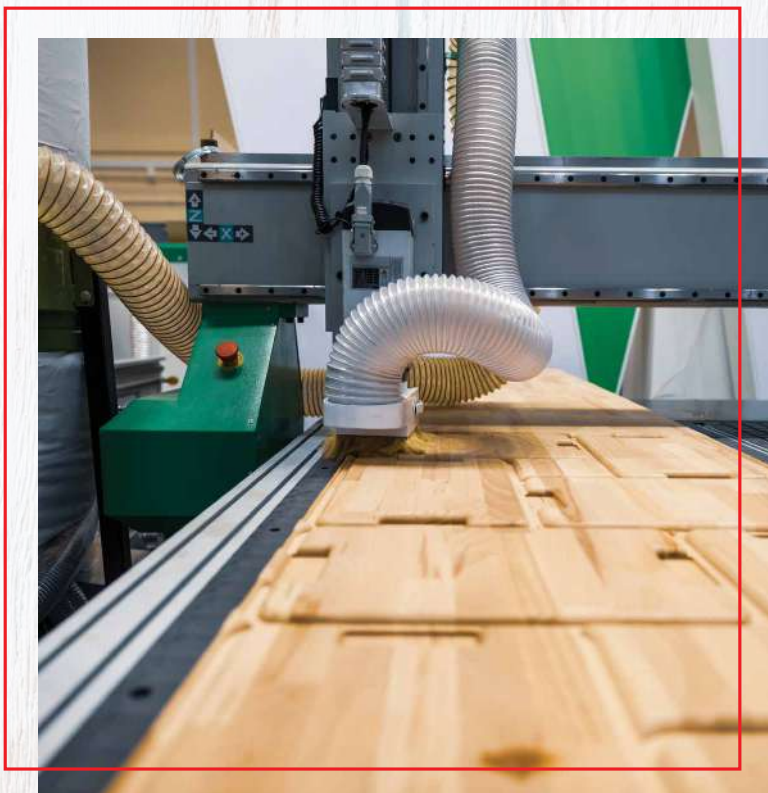

KEEPING THINGS TOGETHER

MITOL

Adhesive solutions for every manufacturing challenge you face

MITOL is the leading Slovenian producer of adhesives providing innovative and effective solutions in the field of gluing for more than 75 years. With reliable, technologically advanced products and superior customer service we have managed to build close relationship with our partners in more than 35 countries around the globe. Being aware of the sustainability challenges we devote special attention to the selection of materials and production processes that reduce environmental impact.

Our brands: developed for you

Modern production processes, material diversity and high-quality end products require innovative technological and adhesive solutions. Mitol offers a wide selection of carefully developed top-quality products for different woodworking applications for professional use as well as for industrial processes. For the widest spectrum of uses, an endless array of materials and every possible idea – Mitol always has an adhesive solution for you. Just find the brand that meets your requirements the best.



■ MEKOL

MEKOL is a well-known brand for a broad selection of adhesives based on PVAC, EVA, acrylic and PU dispersions. MEKOL products are water based and represent an ecological and environmentally-friendly solution. Our own production of dispersions gives us the advantage of having better control over the quality of final products and enables us to be more creative in developing new adhesives.

Because of low production costs, easy processing and cleaning, MEKOL adhesives are efficiently used for a variety of applications in woodworking and furniture industry, such as solid wood processing, flat and 3D lamination, postforming, dowelling and frame bonding.

■ TERMOKOL

TERMOKOL products embrace a wide selection of high-quality hot melt adhesives based on EVA copolymers. They are in solid state at room temperature. They are applied in melted (liquid) form, so they must be heated to the working temperature (120°C – 200°C) before use. TERMOKOL products are distinguished by good adhesion to different materials, strong joint and short setting times which allow high production capacities.

A broad selection of products is available in a wide range of viscosity, open times and specific adhesion on various materials.

Due to their unique characteristics, TERMOKOL hot-melts are successfully used for different applications in furniture industry, such as edgebanding, profile wrapping and assembly operations.

■ TERMOKOL ULTRA

TERMOKOL ULTRA is a line of polyolefin based hot-melt adhesives. Due to their excellent characteristics, TERMOKOL ULTRA hot- melts have superior flowing performance, good thermal stability, don't make threads and enable lower adhesive consumption. They form high-quality joints and have excellent adhesion to difficult surfaces like PVC and PP. They are specially recommended for the products where very strong joints and resistance to low and high temperatures are required.

■ TERMOKOL PUR

TERMOKOL PUR is a new line of high-quality reactive hot melt adhesives with a wide range of adhesion to different materials. PUR hot melts build up excellent green adhesion after cooling to room temperature. After complete crosslinking the bond is strong and resistant to water, heat and chemicals. Due to low processing temperature, they are ideal for gluing thermoplastic materials

■ MITOPUR

MITOPUR brand represents a selection of one- and two-component polyurethane adhesives. Reactive systems cure by a reaction between glue and moisture or water (1C systems) or by a reaction between two components (2C systems). The products from this group are characterized by good adhesion to different materials and surfaces, the joint is resistant to water and temperatures from -40°C to + 120°C, it has high final strength and retains elasticity even at low temperatures. The ability of 1C PU adhesives to foam in reaction with water is successfully used to fill the gaps and reduce glue consumption.

■ UROKOL

UROKOL products are one-component urea formaldehyde adhesives in powder form used for hot pressing of veneer to wooden boards. Compared to urea formaldehyde glues in liquid form, they have longer shelf life and are easy to store and transport.

Our vision

Our vision is to **become a key global partner in adhesive solutions for the woodworking.**
We are driven by continuous innovation, customer collaboration, and a commitment to sustainability.
Our Vision Line adhesives reflect the **highest standards of performance, tailored for cutting-edge applications** in modern manufacturing processes.



Adhesives contain at least 20% biobased materials



Adhesives do not compromise the recyclability of the end product



Energy-saving hot melt adhesives – reduce working temperatures by at least 20%



Low-emission adhesives



Solid wood processing

Like no other material, wood stands for quality and naturalness, and can be used for structures in construction, windows and door frames, floors, kitchen worktops, tables and chairs. Due to very unique requirements for different products, choosing the proper adhesive is of the utmost importance for a smoothly running production process and superior quality of final product.



Solid wood panels

Single and multilayer solid wood panels consist of slats or strips of wood, which are mostly glued together with PVAC adhesives. The adhesives meet the requirements for D2, D3 and D4 durability class, are fast-setting and formaldehyde-free. Boards exposed to variable climatic conditions have to provide a highly resistant bond with permanent durability. In this case, extremely strong polyurethane adhesives based on moisture-curing polyurethane prepolymer must be used.



Product	Base	Viscosity (mPas) 23°C	Open time (min.)	Pressing time (min.)	Durability group EN 204	Special properties
MEKOL 1120	PVAC dispersion	7500 – 10500	4 - 7	15 - 20	D2	for gluing softer wood species
MEKOL 1130	PVAC dispersion	7000 – 10000	2 - 4	15 - 30	D3/D4	Standard type, fast setting, WATT'91 (80)>7N/mm²
MEKOL 1133	PVAC dispersion	7000 – 10000	4 - 10	15 - 30	D3/D4	longer open time, WATT'91 (80)>7N/mm²
MEKOL 1141	PVAC dispersion	11 000 – 14000	3 - 7	20 - 40	D4	2C D4 glue, WATT'91 (80)>7N/mm²
MEKOL 1144	PVAC dispersion	approx 6.000	4 - 10	20- 40	D4	1C D4 glue, WATT'91 (80)>7N/mm²
MEKOL 1163	PVAC dispersion	7000 – 10000	3 - 7	15 - 30	D2	high bond strength
MITOPUR E45	1C PUR prepolymer	5500 - 9000	30 - 45	45 - 60	D4+	hard-to-stick surfaces, extreme climatic conditions

Windows and door frames

Window scantlings and door frames may be exposed to extreme weather conditions. They are largely bonded with PVAC adhesives, which meet the requirements for durability class D4 according to EN 204. They are formaldehyde free, user and environmentally-friendly products. They can be used in cold, hot and HF presses. Two-component emulsion polymer isocyanate (EPI) adhesives also meet the requirements for durability class D4 and are specially recommended for bonds with direct exposure to weathering and bonding of modified wood.



Product	Base	Viscosity (mPas) 23°C	Open time (min.)	Pressing time (min.)	Durability group EN 204	Special properties
MEKOL 1130	PVAC dispersion	7000 – 10000	2 - 7	15 - 30	D3/D4	Standard type, fast setting, WATT'91 (80)>7N/mm²
MEKOL 1133	PVAC dispersion	7000 – 10000	4 - 10	15 - 30	D3/D4	longer open type, WATT'91 (80)>7N/mm²
MEKOL 1141	PVAC dispersion	10 000 – 14000	3 - 7	20 - 40	D4	2C D4 glue, WATT'91 (80)>7N/mm²
MEKOL 1144	PVAC dispersion	approx. 6.000	4 - 10	20 - 40	D4	1C D4 glue, WATT'91 (80)>7N/mm²
MEKOL 1152	EPI dispersion	8000 - 11000	10 - 15	20 - 40	D4+	2C glue, WATT'91 (80)>10N/mm²
MITOPUR E45	1C PUR prepolymer	5500 - 9000	30 - 45	45 - 60	D4+	hard-to-stick surfaces, extreme climatic conditions

Furniture manufacture/cabinetry

Furniture production is the only industry reflecting the lifestyle of consumers. The furniture is equipped with many functions to meet various different requirements at the same time. Material diversity and faster production speed can only be achieved with powerful adhesives.



3D lamination

3D thermally coated furniture fronts represent an important segment in the furniture industry. The manufacturing processes and adhesives used have to meet the latest industry requirements and ensure a reliable bond. One- and two-component adhesives based on PUR dispersions are the guaranty for a perfect surface look and quality bonding with excellent heat and water resistance.



Product	Base	Viscosity (mPas) 23°C	Reactivation temperature (°C) in the glue line	Special properties
MEKOL 1950	PU dispersion	500 - 900	60 - 80	1C/2C glue, standard type
MEKOL 1952/O	PU dispersion	600 - 1000	60 - 80	1C/2C glue, light blue color
MEKOL 1953	PU dispersion	1500 - 3500	60 - 70	1C glue, built-in latent hardener, high heat resistance
MEKOL 1954	PU dispersion	1600 - 2500	55 - 60	1C/2C glue, standard type
MEKOL 1956	PU dispersion	1500 - 2600	55 - 60	1C glue, built-in latent hardener, low reactivation temperature
MEKOL 1958	PU dispersion	1600 - 2500	52 - 60	1C glue, low reactivation temperature
MEKOL 1130	PVAC dispersion	7000 – 10000	above 80	1C/2C glue for 3D veneering
MEKOL 1921	copolymer dispersion	15 000 – 20 000	above 80	1C glue for simple 3D gluing of PVC

Flat lamination

In modern furniture, wood-based panels are laminated with the most diverse materials. Frequently used materials are decor foils, veneers, thermoplastic foils, CPL and HPL. These materials are bonded using a variety of technologies, which demand specific adhesive solutions, such as innovative adhesives based on formaldehyde free PVAC dispersions meeting the requirements for durability class D1, D2 and D3 quality according to EN 204, as well as special copolymer dispersions for gluing thermoplastic foils. For difficult gluing surfaces, like laminated particle board, 1C polyurethane adhesives based on moisture-curing prepolymer are the proper solution.



Product	Base	Viscosity (mPas) 23°C	Open time (min.)	Pressing time (min.)	Durability group EN 204	Special properties
MEKOL 1001/M	PVAC dispersion	8000 – 11500	6 - 15	25 - 30	D1	meets the requirements IMO Resolution A.1/3.18e (Modul B), construction class division B and C
MEKOL 1031	PVAC dispersion	8 500 – 11 500	4 - 12	20 - 30	D3	warm pressing
MEKOL 1034	PVAC dispersion	10 000 – 16 000	4 - 10	15 - 30	D3	fast setting glue
MEKOL 1034 VISION	PVAC dispersion	10 000 – 16 000	4 - 10	15 - 30	D3	a fossil resources saving product certified by the ISCC PLUS certification scheme
MEKOL 1120	PVAC dispersion	7 500 – 10 500	4 - 7	15 - 20	D2	fast setting glue
MEKOL 1130	PVAC dispersion	7 000 – 10 000	2 - 7	15 - 30	D3	standard type, fast setting, WATT'91(80)>7N/mm²
MEKOL 1163	PVAC dispersion	7 000 – 10 000	3 - 7	15 - 30	D2	high bond strength
MEKOL 1921	copolymer dispersion	15 000 – 20 000	2 - 3	continuous process	/	PVC, PP and decor paper foil lamination, high initial tack
MITOPUR E20	1C PUR prepolymer	2 500 – 5 000	12 - 20	20 - 60	D4	bonding sheet metal, isolation materials and wood
UROKOL P 410	One shot urea-formaldehyde resin	250 – 450 (20°C; 50% water solution)	5 - 7	0,8 – 1,3/ 100°C	/	veneering in hot press > 100°C; E1 class
TERMOKOL PUR 2531	PUR hot melt	approx. 4000 (at 140°C)	long ~ 15 min.	continuous process	D4+	long open time, high initial tack
TERMOKOL PUR 2532	PUR hot melt	11 000 - 15 000 (at 120°C)	medium ~ 6 min.	continuous process	D4+	high green strength, all round product

Post forming

Forming HPL, CPL, multi-layered papers in the post-forming process requires special PVAC glues with excellent spraying ability, high green strength and high setting speed.



Product	Base	Viscosity (mPas) 23°C	Durability group	Special properties
MEKOL 1908	PVAC dispersion	8 500 – 11 500	D2	nozzle application

Doweling, frame bonding, assembling

Dowelling glues are special PVAC dispersion adhesives for bonding hard wood, soft wood and wood-based substrates. Rheology of these adhesives is adapted for manual and fully automated nozzle application. Special additives in formulation prevent the material build-up at the nozzle tips. The adhesives form a tough-elastic glue film.

For special assembling operations and very fast bonding hot melt adhesives are innovative bonding solutions. They are applied with special hot melt guns.



Cold gluing

Product	Base	Viscosity (mPas) 23°C	Open time (min.)	Pressing time (min.)	Durability group EN 204	Special properties
MEKOL 1001	PVAC dispersion	9000 – 12000	6 - 15	10 - 15	D1	standard type
MEKOL 1008	PVAC dispersion	7000 - 9000	4 - 10	10 - 15	D3	nozzle application
MEKOL 1101	PVAC dispersion	20000 – 25000	3 - 5	5 - 10	D2	very fast setting, strong bond
MEKOL 1110	PVAC dispersion	14000 – 18000	3 - 8	8 - 12	D2	fast setting, very strong bond, especially for chairs assembling
MEKOL 1908	PVAC dispersion	8500 – 11500	2 - 3	8 - 12	D2	fast setting, nozzle application
MITOPUR E45	1C PUR prepolymer	5500 - 9000	12 - 20	45 - 60	D4	hard-to-stick surfaces

Hot gluing

Product	Base	Viscosity (mPas)	Softening point (°C)	Pressing time (min.)	Special properties
TERMOKOL 2108	EVA hot melt	1500 – 2200 (at 150°C)	77 - 87	3 – 5 seconds	standard type

Edgebanding

Edgebanding of wood-based panels with a variety of edge bands has been an established practice in furniture industry. High quality hot melts based on EVA and PO polymers ensure superior bonding strength, zero-bond line appearance as well as resistance to heat. They are designed for automatic and manual edgebanding and operate at a wide range of feed speeds and application temperatures.



Automatic

Product	Base	Viscosity (mPas) at 200°C	Softening point (°C)	Processing temperature (°C)	Special properties
TERMOKOL 2003	EVA hot melt	70000 – 110000	98 - 108	190 - 210	economic type
TERMOKOL 2015	EVA hot melt	60000 – 80000	98 - 108	170 - 200	standard type
TERMOKOL 2019	EVA hot melt	65000 – 85000	100 - 112	180 - 210	universal type
TERMOKOL 2025	EVA hot melt	48000 – 58000	108 - 113	180 - 200	unfilled type, also for processing centre and soft forming
TERMOKOL 2031	EVA hot melt	27000 – 41000	93 - 103	160 - 200	low application temperature
TERMOKOL 2072	EVA hot melt	85000 – 110000	105 - 111	190 - 200	high quality bonding, also for processing centre and soft forming
TERMOKOL 2073	EVA hot melt	27000 – 33000	86 - 96	160 - 190	low application temperature, economic type
TERMOKOL 2075	EVA hot melt	45000 – 55000	103 - 108	170 - 200	invisible, transparent glue line
TERMOKOL ULTRA 2043	PO hot melt	47000 – 57000	150 - 160	180 – 200	very high heat resistance
TERMOKOL PUR 2506	PUR hot melt	approx. 65000 (at 140°C)	approx. 70	130 - 160	very high green strength, wide range of adhesion

Manual

Product	Base	Viscosity (mPas) at 150°C	Softening point (°C)	Processing temperature (°C)	Special properties
TERMOKOL 2006	EVA hot melt	30000 - 40000	90 - 100	130 - 160	unfilled type
TERMOKOL 2008	EVA hot melt	35000 – 60000	80 - 90	140 - 160	for PVC bonding
TERMOKOL 2031	EVA hot melt	27000 – 41000 (200°C)	93 - 103	160 - 200	universal type

Profile wrapping

Profile wrapping is one of the current hot topics. Various foils, papers and veneers are bonded to solid wood and other wood-based materials to produce cornice rails, drawer frames, wall and ceiling panels, door frames and other decorative profiles.

The modern technology for adhesive application is running continuously using special EVA, PUR, and PO-based hot melts with specific adhesion, fast setting superior bonding and heat resistance.



Product	Base	Viscosity (mPas) at 170°C	Softening point (°C)	Processing temperature (°C)	Special properties
TERMOKOL 2027	EVA hot melt	10000 – 14000	80 - 90	170 - 200	standard type
TERMOKOL 2028	EVA hot melt	11000 – 15000	75 - 85	170 - 200	quick melting, long open time
TERMOKOL 2030	EVA hot melt	10000 – 16000	80 - 90	170 - 200	high green strength
TERMOKOL 2032	EVA hot melt	9500 – 11500	73 - 76	130 - 170	PVC, PP wrapping
TERMOKOL 2039	EVA hot melt	10000 – 15000	90 - 95	170 - 200	unfilled type, transparent
TERMOKOL 2090	EVA hot melt	14000 – 17000	75 - 85	150 - 180	PVC, PP wrapping, transparent
TERMOKOL ULTRA 2051	PO hot melt	4500 – 6000 (at 200°C)	125 - 135	170 - 200	high heat resistance, transparent, long open time
TERMOKOL ULTRA 2053	PO hot melt	15000 – 20000 (at 200°C)	150 - 155	190 - 210	high heat resistance
TERMOKOL ULTRA 2054	PO hot melt	8000 – 12500 (at 200°C)	128 - 135	190 - 210	high heat resistance, transparent
TERMOKOL ULTRA 2056	PO hot melt	10000 – 15000 (at 200°C)	145 - 152	190 - 210	very high heat resistance, transparent
MEKOL 1921	Copolymer dispersion	15000 – 20000 (at 23°C)	/	cold processing	profile wrapping, with PVC or PP foil, high green strength
TERMOKOL PUR 2510	PUR hot melt	approx. 27000 (at 140°C)	approx. 65	110 – 150	wrapping process of wood based profiles with decorative paper and PVC foil, long open time

These products represent a limited selection of our product range. Contact our specialists for more information or technical data sheets.



Adhesive solutions for every manufacturing challenge.



**TAILOR-MADE
SOLUTIONS**



**CONNECTIONS
WITH OUR R&D
& TECHNICAL TEAMS**



**LAB & ON-SITE
TESTING**



**FLEXIBLE
SOLUTION
DELIVERY**



MITOL is the leading Slovenian producer of adhesives providing innovative and effective solutions in the field of gluing for more than 70 years. With reliable, technologically advanced products and superior customer service we have managed to build close relationship with our partners in more than 35 countries around the globe. Being aware of the sustainability challenges we devote special attention to the selection of materials and production processes that reduce environmental impact.



MITOL, tovarna lepil, d.o.o., Sežana
Partizanska cesta 78, 6210 Sežana, Slovenija
T: +386 5 73 12 300
F: +386 5 73 12 390
E: mitol@mitol.si
www.mitol.si

KEEPING THINGS TOGETHER

MEMBER OF THE **SOUDAL** GROUP